

NEW

EWP 120 NM HIGH EFFICIENCY

ENERGY CONSERVING EMERGENCY
LIGHTING LUMINAIRE




Technical Data

Mode Of Operation	: Non-Maintained
Input Voltage	: 240V±10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium Battery
Charging Current	: 70mA (Nominal)
Lamp Used	: 2.0 Watt SMD LED
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current Solid-State Electronics Provide High Reliability with Trickle Charge-Facility
Indication	: Red L.E.D. "On" Indicates Charging Equipped with Push Test-Switch to Simulate Power Failure
Backup Time	: 3 Hours Duration
Construction	: Injection Moulded Fire-Retardant Polycarbonate Housing with Rear Knockout Cable Entry
Weight	: <u>0</u> 0.6kg
#Warranty	: 5 Years
Compliance	: Malaysia Standards MS-619, IP-65
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery.


Dimension in mm Tolerance: ±0.03

Wall Mounting

TOP VIEW

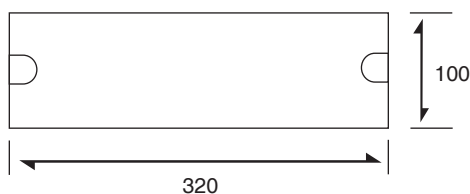

BOTTOM VIEW

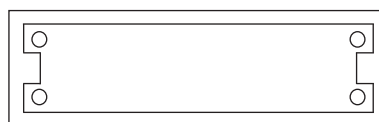

SIDE VIEW

